
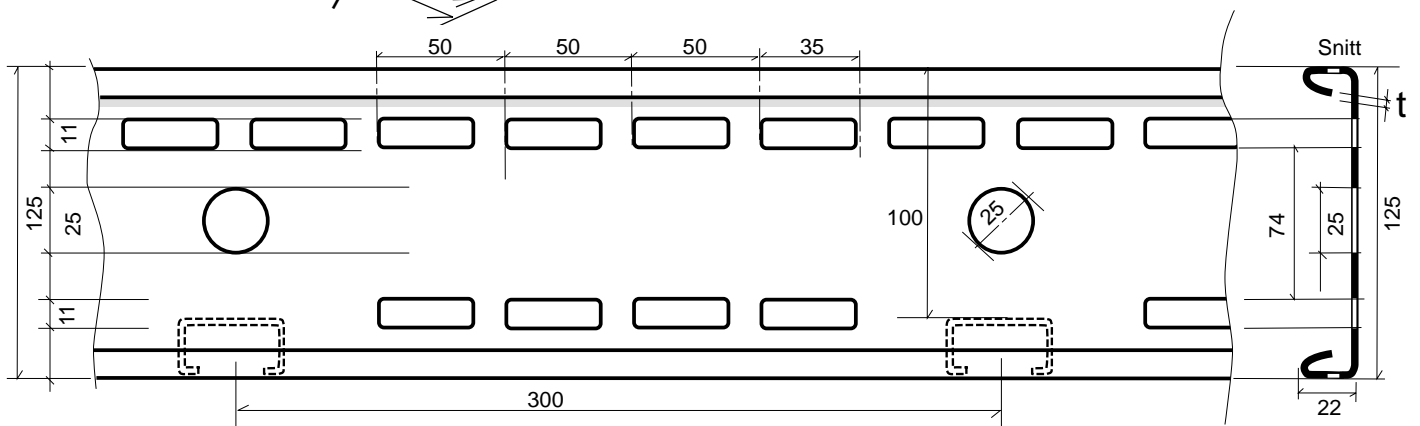


OE stigen

D.N.V. cert. No. E 4172

OE ladder

Type OE 125

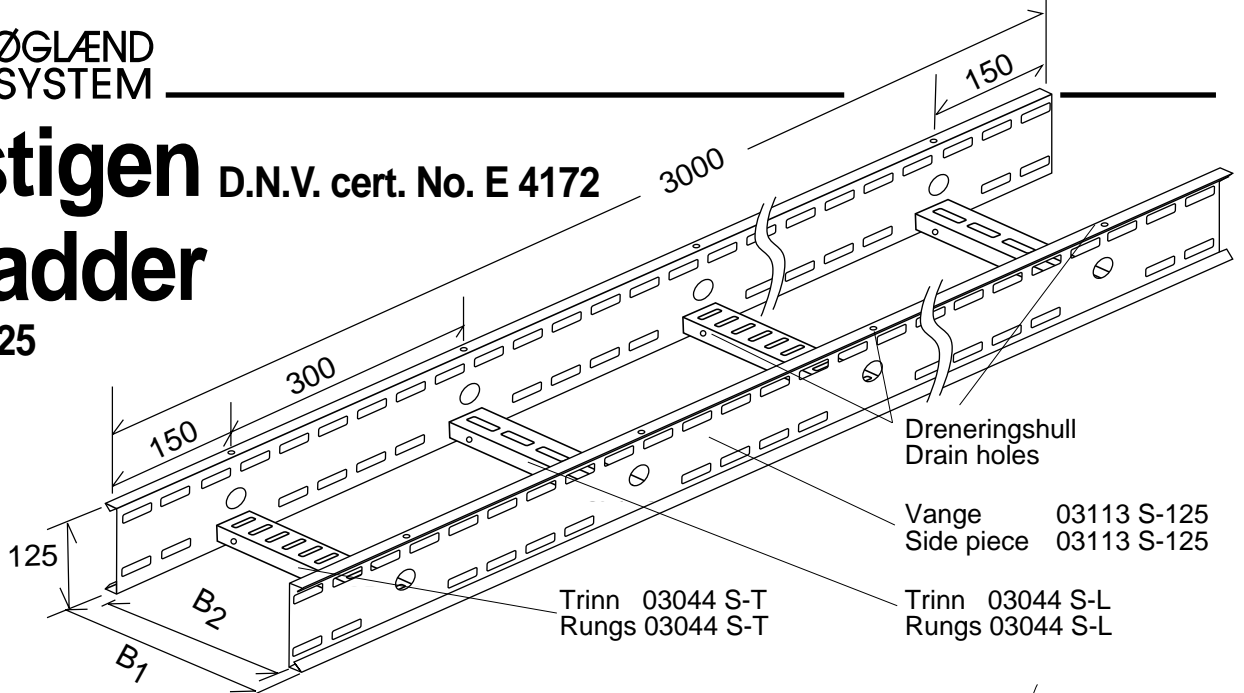


Standard lengde / Standard length: 3 m.

Trinn kan og leveres i 3 m lengder.
Rungs can be supplied in 3 m length.

Material tykkelse – Material thickness

Hot. dip. galv: t = 2,0 mm
Stainless Steel: t = 1,5 mm
Aluminium: t = 2,5 mm

Weight in H.d.G.(HG) = Weight in SS x 1,4
Weight in Alu(AL) = Weight in SS x 0,7

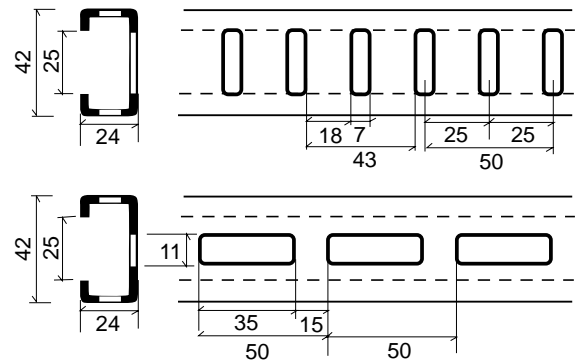

I tillegg til hva symbolene viser
kan programmet på bestilling
leveres epoxybelagt.

In addition to what the symbols show
epoxy coated is supplied on request.

Netto bredde: Width: B ₂	Brutto bredde: Width: B ₁	Type	Varmgalv.HDG H.d. galv. Bestillingsnr.: Art. no.:	Rustfritt SS Stainless Bestillingsnr.: Art. no.:	Aluminium AL Aluminium Bestillingsnr.: Art. no.:	Vekt SS: Weight SS:
150mm	194mm	OE 125-150	80000	80180		4,5 kg/m
300mm	344mm	OE 125-300	80001	80181		5,3 kg/m
450mm	494mm	OE 125-450	80002	80182		6,0 kg/m
600mm	644mm	OE 125-600	80003	80183		6,3 kg/m
750mm	794mm	OE 125-750	80004	80184		6,9 kg/m
900mm	944mm	OE 125-900	80005	80185		7,7 kg/m