
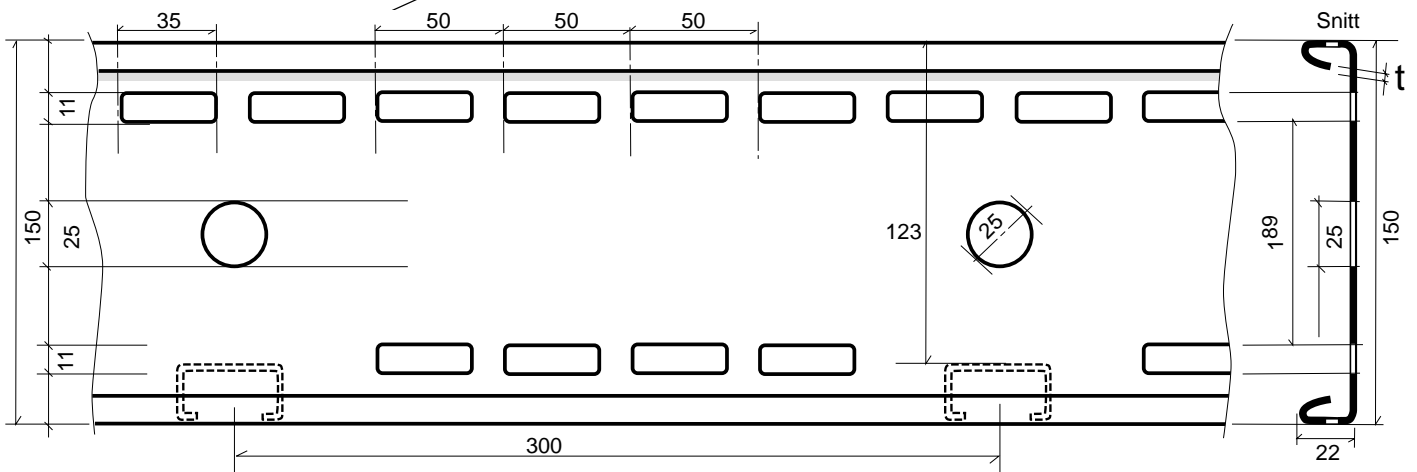


OE stigen

OE ladder

D.N.V. cert. No. E 4172

Type OE 150

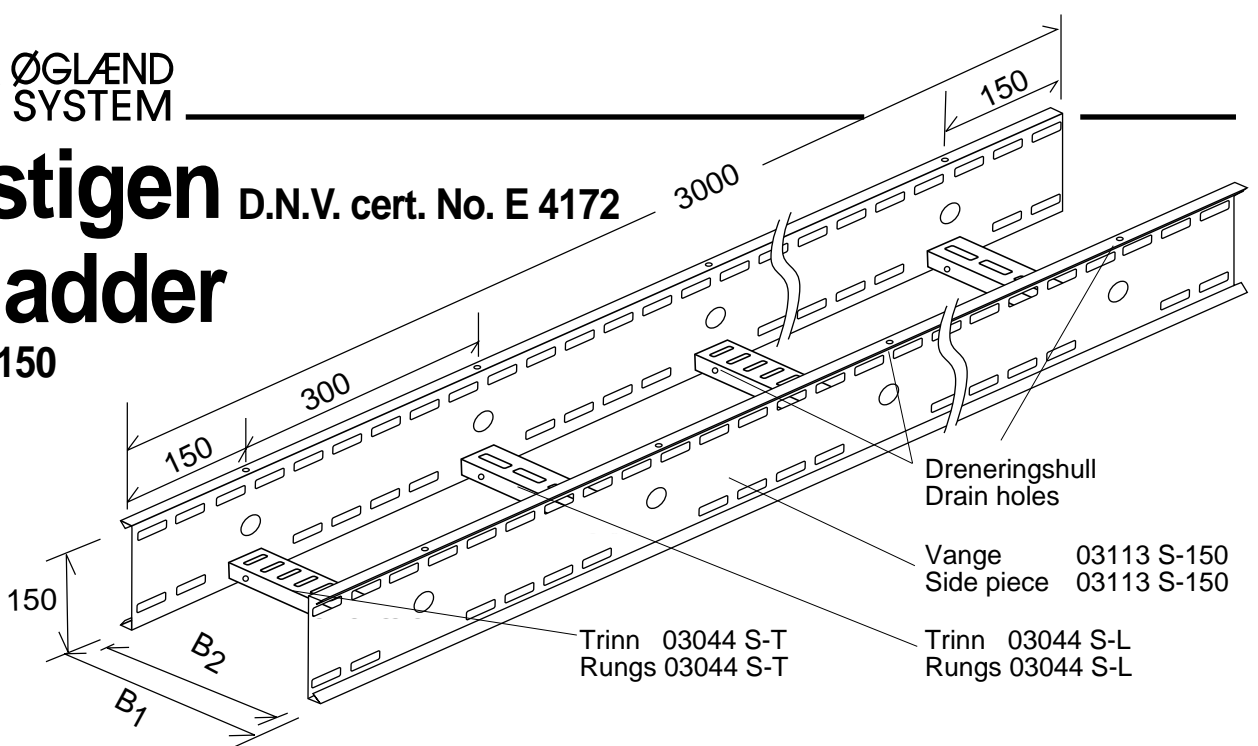

Standard lengde / Standard length: 3 m.

Trinn kan og leveres i 3 m lengder.
Rungs can be supplied in 3 m length.


Material tykkelse – Material thickness

Hot. dip. galv: t = 2,0 mm
Stainless Steel: t = 1,5 mm
Aluminium: t = 2,5 mm

Weight in H.d.G.(HG) = Weight SS x 1,4
Weight in Alu(AL) = Weight SS x 0,7

**I tillegg til hva symbolene viser
kan programmet på bestilling
leveres epoxybelagt.**

**In addition to what the symbols show
epoxy coated is supplied on request.**

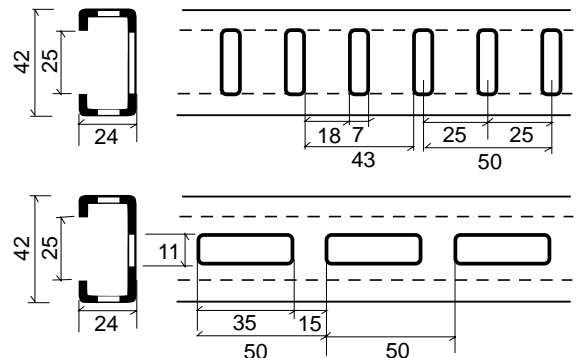

Netto bredde: Width: B ₂	Brutto bredde: Width: B ₁	Type	Varmgalv.HDG H.d.galv.	Rustfritt SS Stainless	Aluminium AL Aluminium	Vekt SS: Weight SS:
		Type	Bestillingsnr.: Art. no.:	Bestillingsnr.: Art. no.:	Bestillingsnr.: Art. no.:	
150mm	194mm	OE 150-150	79800	79806		5,8 kg/m
300mm	344mm	OE 150-300	79801	79807		6,4 kg/m
450mm	494mm	OE 150-450	79802	79808		7,0 kg/m
600mm	644mm	OE 150-600	79803	79809		7,5 kg/m
750mm	794mm	OE 150-750	79804	79810		8,0 kg/m
900mm	944mm	OE 150-900	79805	79811		8,7 kg/m